


RB350

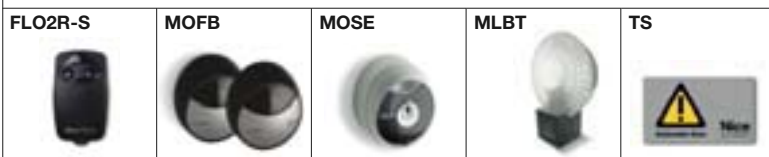

**The kit contains:**

**RB350** 1 irreversible electromechanical gear motor, with incorporated control unit and SMXI plug-in receiver which can be used for connections via Nice BlueBUS. **FLO2R-S** 1 transmitter 433.92 MHz, 2 channels. **MOFB** 1 couple of external photocells designed for connection by Nice BlueBUS. **MOSE** 1 key selector switch for outdoor installation. **MLBT** 1 flashing light with integrated aerial. **TS** 1 signboard.

**For sliding gates weighing up to 350 kg, with Nice BlueBUS technology.**

**User-friendly:** the Nice BlueBUS technology, enables to power and control a maximum of seven couples of photocells from the MoonBus series using two wires only.

**Practical:** the control unit and PS124 buffer battery (optional) can be connected by means of a simple connector and can be housed directly inside Robus.

**Advanced:** the speed, strength and pause can all be adjusted.

**Intelligent:** thanks to the obstacle detection system and automatic programming of the working times. Self-diagnosis by means of a flashing light.

**Safe:** acceleration and deceleration can be adjusted at the beginning and end of each opening and closing manoeuvre.


**Sturdy:** base and release in pressure die cast aluminium and epoxy paint finish.

**Very quiet:** gear motor on bearings.

**Technical specifications**

|                                     |               |
|-------------------------------------|---------------|
| Code                                | <b>RB350</b>  |
| <b>Electrical data</b>              |               |
| Power supply (Vac 50 Hz)            | 230           |
| Absorption (A)                      | 1.1           |
| Power (W)                           | 250           |
| Built-in capacitor (µF)             | -             |
| <b>Performance data</b>             |               |
| Speed (m/s)                         | 0.34          |
| Force (N)                           | 333           |
| Work cycle (cycles/hour)            | 30            |
| <b>Dimensional and general data</b> |               |
| Protection level (IP)               | 44            |
| Working temp. (°C Min/Max)          | -20 ÷ +50     |
| Dimensions (mm)                     | 330x195x277 h |
| Weight (kg)                         | 8             |

**Installation diagram**

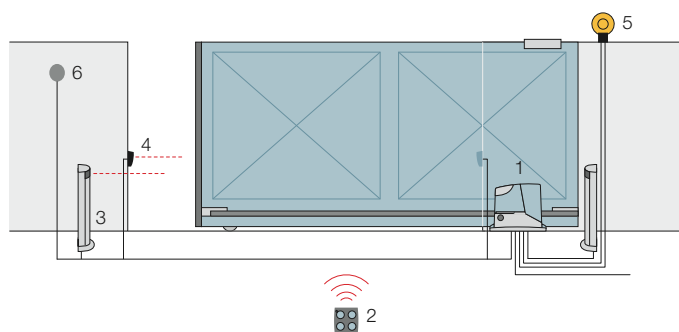

1. Robus 2. Transmitter 3. Photocells mounted on posts 4. Photocells 5. Flashing light 6. Key switches.