

WINGOKIT

230V

For swing gates with leaves up to 2 m, surface mounted.

Reliable and silent:

patented layout of internal parts, fewer moving parts.

Easy to install: after the gear motor has been assembled, all electrical connections are made from above.

Built-in capacitor.

User-friendly release with personalised Nice key or standard lock (optional).

Pre-assembled, travel stops on opening.

A60 control unit for two 230 Vac motors with electronic clutch and slowdown, IP55 casing.

THE KIT CONTAINS:

WG4000
2 SURFACE-MOUNTED ELECTROMECHANICAL GEAR MOTORS, WITH NICE KEY RELEASE AND MECHANICAL STOP ON OPENING.

FLO2RE
1 TRANSMITTER
433.92 MHz, 2 CHANNELS.

A60
1 CONTROL UNIT A60
WITH SMXI PLUG-IN RECEIVER.

MOF
1 PAIR OF PHOTOCELLS
FOR OUTDOOR INSTALLATION.

MOSE
1 KEY SELECTOR SWITCH
FOR OUTDOOR INSTALLATION.

MLT
1 FLASHING LIGHT WITH
INTEGRATED AERIAL.

TS
1 SIGNBOARD.



| CODE | DESCRIPTION | PACK/PALLET |
|--------------|--|-------------|
| WINGOKCE/A60 | KIT FOR SWING GATES WITH LEAVES UP TO 2 m, SURFACE MOUNTED | 12 |


N.B. The content of the package may vary: consult the retailer.

TECHNICAL SPECIFICATIONS


| CODE | WG4000 |
|-------------------------------------|-------------|
| ELECTRICAL DATA | |
| POWER SUPPLY (Vac 50 Hz)* | 230 |
| ABSORPTION (A) | 1.5 |
| POWER (W) | 200 |
| PERFORMANCE DATA | |
| SPEED (m/s) | 0.016 |
| FORCE (N) | 1500 |
| WORK CYCLE (CYCLES/HOUR) | 30 |
| DIMENSIONAL AND GENERAL DATA | |
| PROTECTION LEVEL (IP) | 44 |
| WORKING TEMP. (°C MIN/MAX) | -20 ÷ +50 |
| DIMENSIONS (mm) | 770x98x95 h |
| WEIGHT (kg) | 6 |

*60 Hz version available on request.

UTILISATION LIMITS



DIMENSIONS

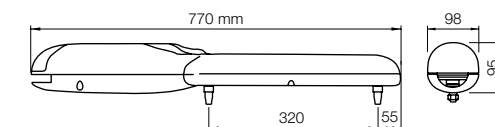

ACCESSORIES



PLA14
SCREW-ADJUSTABLE
REAR BRACKET.

PC/PACK 2




PLA15
SCREW-ADJUSTABLE
FRONT BRACKET.

PC/PACK 2



CM-B
PAWL WITH TWO METAL
RELEASE KEYS.

INSTALLATION DIAGRAM

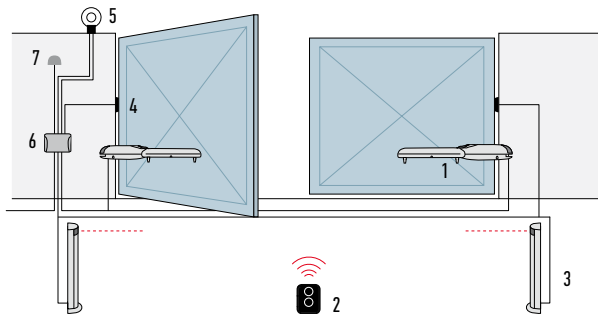

1. MOTOR
2. TRANSMITTER
3. PHOTOCELLS MOUNTED ON POSTS
4. PHOTOCELLS
5. FLASHING LIGHT
6. CONTROL UNIT
7. DIGITAL OR KEY SWITCHES

